

# PERISTALTIC DOSING PUMP

PPE




Seko SpA declares that the pump code **PPE001HA1000\_A** has the following features:



<b>TYPE</b>	PE 1.5
<b>POWER SUPPLY</b>	230 Vac 50/60 Hz
<b>CONSUMPTION</b>	8W
<b>TUBING</b>	SANTOPRENE 6,25x10,65mm (I.D.xO.D.)
<b>FLOW ml/REV</b>	2,5
<b>FLOW RATE ml/min</b>	25
<b>FLOW RATE l/h</b>	1,5
<b>FLOW RATE gph</b>	0,398
<b>BACKPRESSURE</b>	0,1 BAR (1,45psi)
<b>PUMP BODY MATERIAL</b>	Polypropylene (PP)
<b>PUMP COVER MATERIAL</b>	Polycarbonate (PC)
<b>ROLLERS MATERIAL</b>	Polyoxymethylene (POM)
<b>IP DEGREE</b>	IP65
<b>WEIGHT</b>	0,69 Kg (0,97 lb)
<b>DOSING</b>	Fixed flow rate
<b>OPERATING TEMPERATURE</b>	5-50°C
<b>STORAGE TEMPERATURE</b>	-20÷60°C
<b>CERTIFICATION</b>	CE, EAC
<b>INSTALLATION KIT</b>	PC Wall bracket, PP Suction filter with ceramic weight, AISI tank inlet, PVC 4x6 mm suction/delivery tubing

## DIMENSION

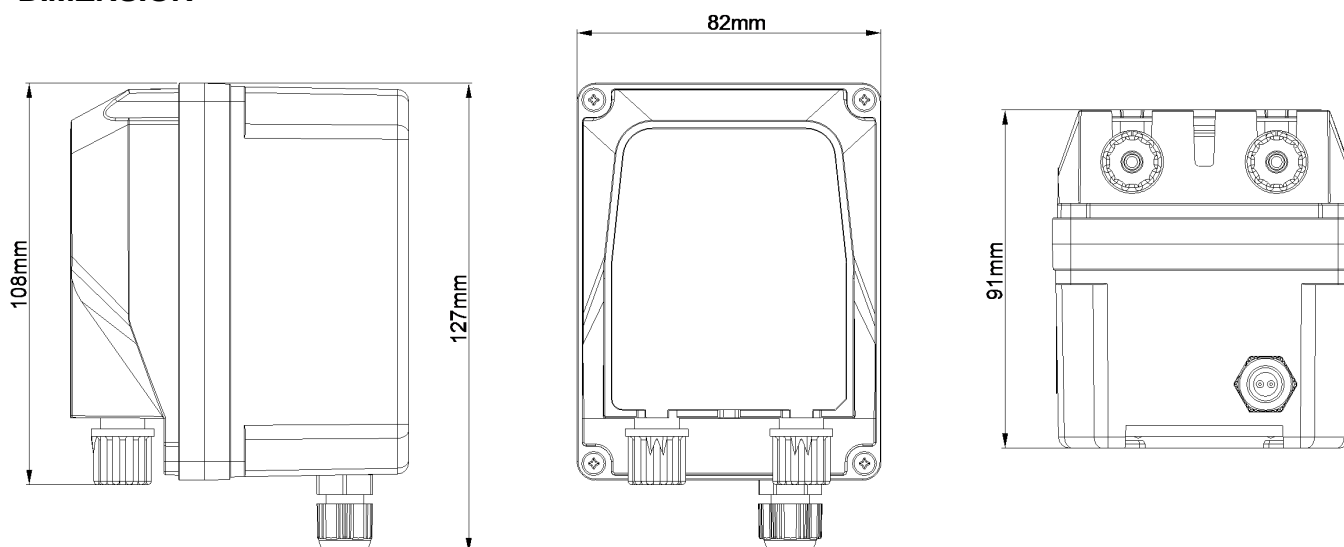

SEKO spa has taken all reasonable measures about the accuracy of this translation, but regrets that no responsibility can be accepted for any error, omission or inaccuracy. In case of doubt or dispute, as provided by the European Directive, only the original language text is valid.

Your Choice,  
Our Commitment

Technical data can be changed without notice.  
TD\_PPE001HA1000\_A\_rev.1.0